


VERTICAL SPIRAL GAUGE

MECHANICALLY OPERATED LIQUID LEVEL GAUGE

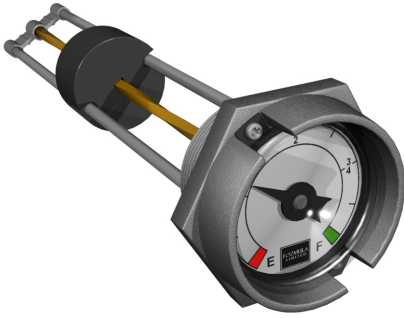

The gauge is mounted vertically from the top of the tank so as the liquid level changes the float follows that change and uses a magnetic coupling to transfer the motion from the float to the level indicator dial. The gauge is completely sealed so there is no risk of the tank contents leaking through the gauge header. The gauge can also be fitted with an electrical interfacing dial indicator, as well as indicators with set switching points.

Fluid Types:

Fluids compatible with the construction materials

Dimensions:

See below


Environmental Ratings:

Temperature - operating: -15°C to 66°C (+5°F to +150°F)
- storage: -40°C to 85°C (-40°F to +185°F)
Vibration test: 0.35mm at 0-10,000rpm on each of the 3 major axes

Construction:

Header: Zinc alloy
Guide rails and foot bar: 316 stainless steel
Spiral drive: Brass (optionally stainless steel)
Float: Polypropylene
Dial capsule: Polycarbonate

Pressure - differential: 290 psi (20 bar)
- burst: >4000 psi (>275 bar)
Shock test: 50g in both directions on each of of the 3 major axes

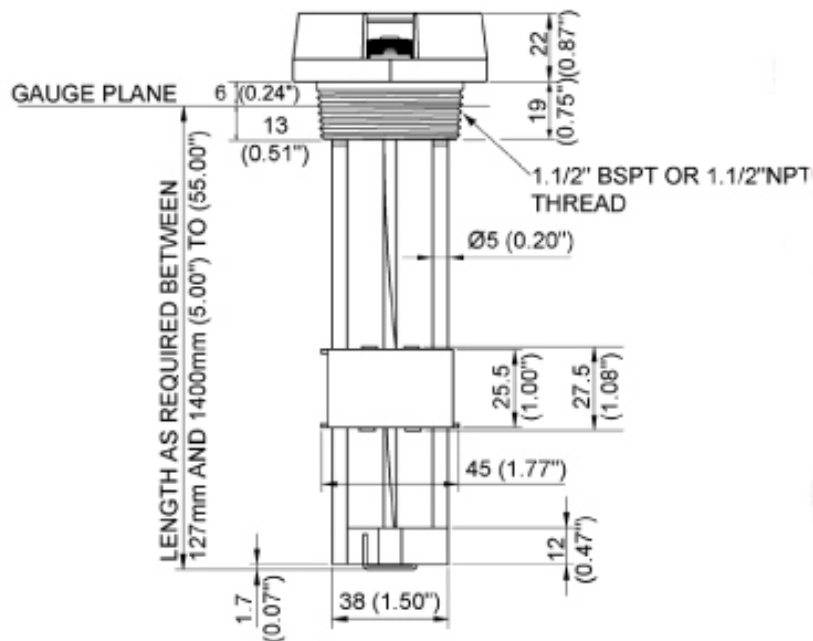

Tek-Tanks Ltd

The Old Stables, West End Farm, Colthouse Lane, Upper Froyle, Alton, Hampshire, GU34 4JR



Telephone: +44 (0) 1420 525478
 Website: www.tek-tanks.com

Fax: +44 (0)1420 520840
 E-mail: sales@tek-tanks.com