

SKIN FITTINGS (THRU HULLS)



Designed and made in New Zealand, **TRUDESIGN™** Skin Fittings (Thru Hulls) are precision moulded from glass-reinforced Nylon composite.

- Certified to ISO 9093-2 by the International Marine Certification Institute (IMCI, Belgium).
- Comply with ABYC H-27 standards when used in conjunction with the **TRUDESIGN™** ABYC collar.
- Certified by Bureau Veritas to ISO 9093-2.

TRUDESIGN™ Skin Fittings (Thru Hulls) eliminate all corrosion and bonding problems associated with electrolysis giving peace of mind with respect to the safety of your vessel.

FEATURES:

- Manufactured from a glass-reinforced Nylon composite – High strength, tough and light weight.
- Compatible with all hull types – Can be used on aluminium, steel, wood, composite & GRP hulls.
- Immune to corrosion & electrolysis – No corrosion breakages, increased safety.
- Chemical resistant – Unaffected by diesel, petrol, chemicals, and antifouling paints.
- U.V resistant – Will not degrade or discolour from the sun's ultraviolet rays.
- Paintable – Paintable with all types of antifoul including Coppercoat™
- Fits **TRUDESIGN™** Ball Valves and other parallel BSP or NPS threads – Universal compatibility to **TRUDESIGN™** brand fittings and other marine hardware.
- Large operating range – Suitable for all marine conditions from -20°C to +100°C
- Supplied in individual plastic bags with a header card and info sheet – Lists IMCI Certification, size, and installation instructions as per IMCI regulations
- Meets ABYC H-27 Standard when installed in combination with **TRUDESIGN™** Ball Valves & Load Bearing Collars.




STANDARDS & APPROVALS:

TRUDESIGN™ Skin Fittings (Thru Hulls) are certified by the International Marine Certification Institute (IMCI) and Bureau Veritas to meet; ISO 9093-2 Small craft. They also meet ABYC H-27 Standard when installed in combination with **TRUDESIGN™** Ball Valves & Load Bearing Collars


Note: ½" size Skin Fitting (Thru Hulls) not approved to ISO 9093-2 or ABYC.

ISO 9093-2 Standard requirements:

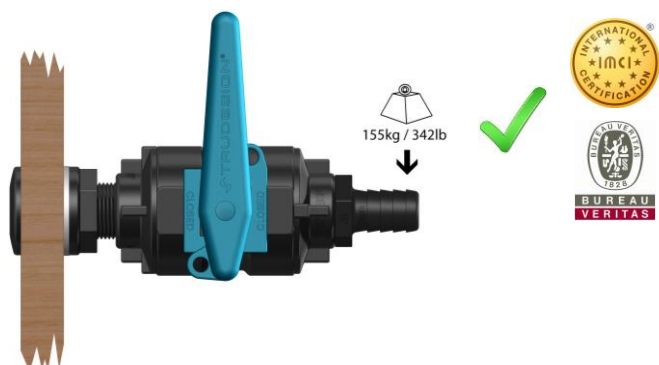


In accordance with ISO 9093-2 standards, Skin Fittings (Thru Hulls) are subjected to a 155kg (341.7lb) load, applied to the threaded section for a minimum of 30 seconds, without any damage occurring.

ABYC H-27 Standard requirements:

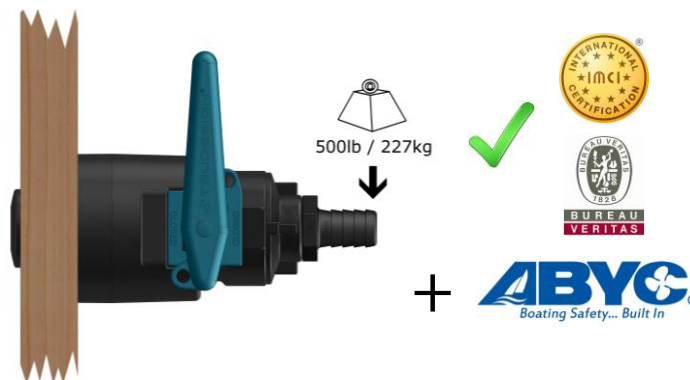

TRUDESIGN™ Skin Fittings (Thru Hulls), when assembled together with **TRUDESIGN™** Ball Valves and Load Bearing Collars, comply with ABYC H-27 standards. This allows the entire assembly to withstand a 500lb (226.8kg) load applied to the inboard end of the assembly (i.e. from the Ball Valve's Tail fitting) for a minimum of 30 seconds without any damage occurring.

TRUDESIGN™ Skin Fittings (Thru Hulls) are printed and marked with the following information;

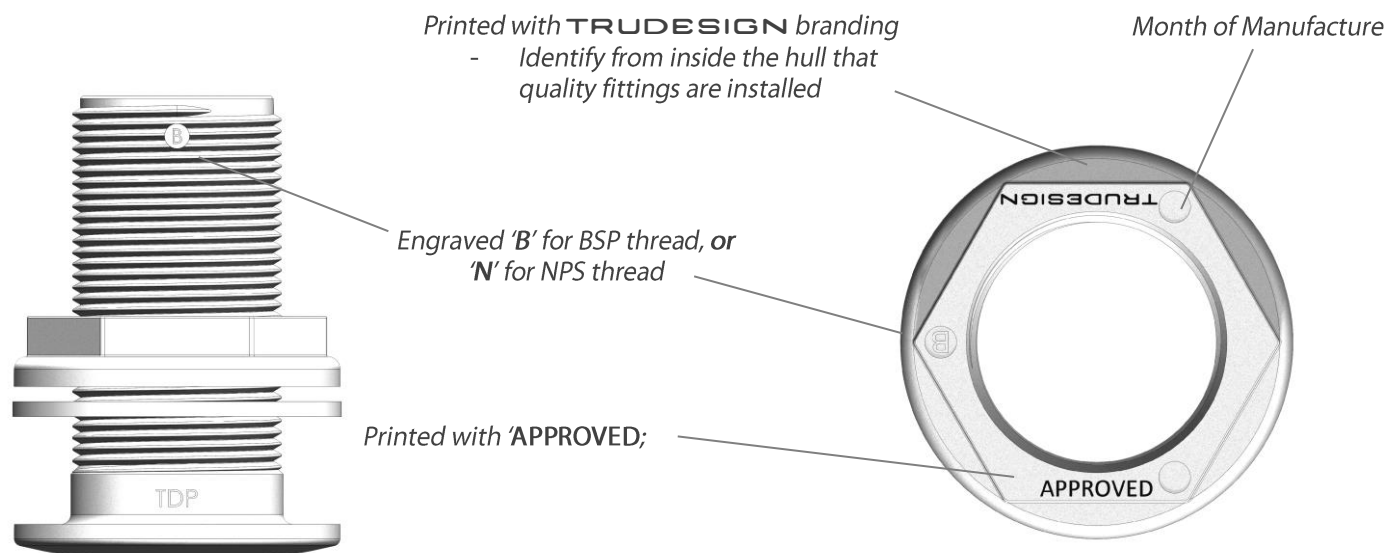


TECHNICAL:

TRUDESIGN™ Skin Fittings (Thru Hull) are suitable for installation in all types of hull construction; steel, aluminium, composite, fibreglass – cored and solid, wood, wooden sandwich and caulked solid wood hulls. Ensure fittings are always installed in the centre of individual planks.

FLOW DIAMETER AND HULL THICKNESS:

Size	Minimum Internal Diameter	Maximum Hull Thickness
½"	12 mm	35 mm
¾"	17 mm	35 mm
1"	23 mm	35 mm
1¼"	30 mm	48 mm
1½"	36 mm	48 mm
2"	49 mm	54 mm

DIMENSIONS: All dimensions in millimetres (mm) All dimensions nominal.

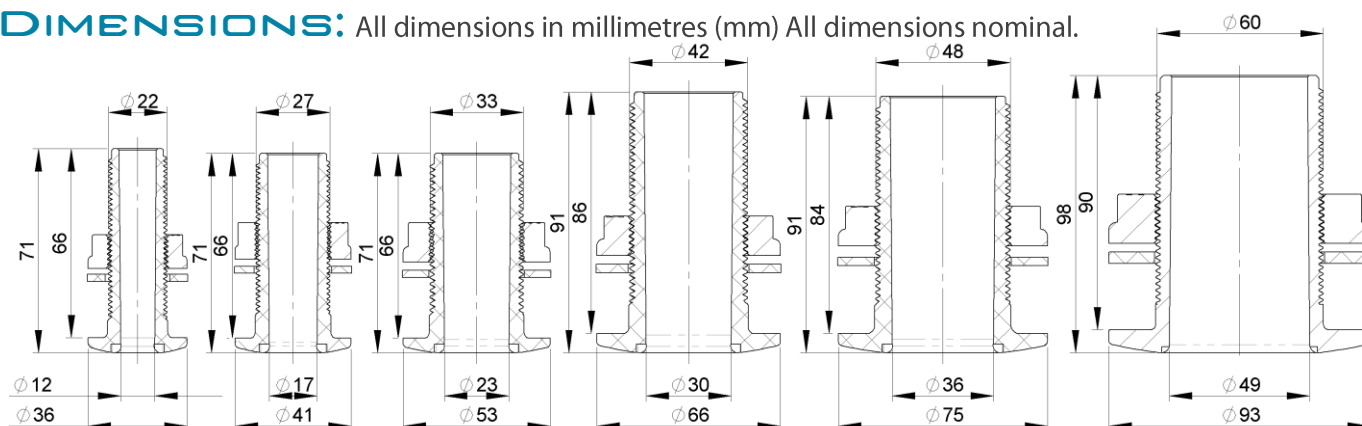

MODELS

Part #	Description
90424	Skin Fitting (Thru Hull) ½" BSP Black
90431	Skin Fitting (Thru Hull) ¾" BSP Black
90422	Skin Fitting (Thru Hull) 1" BSP Black
90420	Skin Fitting (Thru Hull) 1¼" BSP Black
90418	Skin Fitting (Thru Hull) 1½" BSP Black
90428	Skin Fitting (Thru Hull) 2" BSP Black

Part #	Description
90719	Skin Fitting (Thru Hull) ½" NPS Black
90720	Skin Fitting (Thru Hull) ¾" NPS Black
90721	Skin Fitting (Thru Hull) 1" NPS Black
90722	Skin Fitting (Thru Hull) 1¼" NPS Black
90723	Skin Fitting (Thru Hull) 1½" NPS Black
90724	Skin Fitting (Thru Hull) 2" NPS Black

Part #	Description
90425	Skin Fitting (Thru Hull) ½" BSP White
90432	Skin Fitting (Thru Hull) ¾" BSP White
90423	Skin Fitting (Thru Hull) 1" BSP White
90421	Skin Fitting (Thru Hull) 1¼" BSP White
90419	Skin Fitting (Thru Hull) 1½" BSP White
90429	Skin Fitting (Thru Hull) 2" BSP White

Part #	Description
90737	Skin Fitting (Thru Hull) ½" NPS White
90738	Skin Fitting (Thru Hull) ¾" NPS White
90739	Skin Fitting (Thru Hull) 1" NPS White
90740	Skin Fitting (Thru Hull) 1¼" NPS White
90741	Skin Fitting (Thru Hull) 1½" NPS White
90742	Skin Fitting (Thru Hull) 2" NPS White

INSTALLATION:

LOCATION & DRILLING


- Ensure there is sufficient room on the inside of the boat to allow the Ball Valve to be screwed on without hitting the bulkhead or other part of the hull. Note; A "T" handle Ball Valve is available for smaller area locations
- Ensure the location will not cause the valve handle to be knocked open or closed.
- Mark the location and drill from the inside a pilot hole 3mm in diameter. Select a hole-saw 1 mm larger than the outside thread diameter of the Skin Fitting (Thru Hull). From the inside, use the pilot hole as a centre and drill through the hull with the selected hole-saw.

RECOMMENDED HULL ADHESIVE SEALANTS & GLUES:

First clean all surfaces to be bonded with a general-purpose cleaner.

- 3M™ Marine Adhesive Sealant Fast Cure 5200. A one-part polyurethane adhesive/sealant. Starts to cure (tack-free) in approximately 2 hours, after which hoses can be attached. Full cure takes 24 hours – refer to manufacturer's product literature.
- SIKAFLEX® 291i Marine Sealant. A one-part polyurethane adhesive/sealant. Starts to cure (tack-free) in approx. 2 hours, after which hoses can be attached. Full cure takes 24 hours – refer to manufacturer's product literature.
- Bostik® 920 Marine Sealant. A one-part urethane adhesive/sealant. Starts to cure (tack-free) in approx. 2 hours, after which hoses can be attached. Full cure takes 1.5 – 3 days – refer to manufacturer's product literature.
- West System® (or similar) two-pot epoxy that mixes to a paste. Tip – adding filler to the West System® will increase the viscosity and help minimise "running" of the epoxy. Visit <http://www.westsystem.com/ss/filler-selection-guide/> for more details.

*Epoxy or Marine adhesive
sealant area shown in blue*



FITTING & SEALING:

Smear the adhesive or glue on the underside of the Skin Fitting (Thru Hull) flange and a small way up the thread, but no further than the thickness of the hull. It is important not to have any adhesive on the exposed thread area as this could prevent the Nut or Ball Valve from turning.

Insert the Skin Fitting (Thru Hull) through the hull from the outside. Note The **TRUDESIGN™** Skin Fitting Installation Tool enables our skin fittings to be installed by one person saving time and money. See separate information sheet on our web site.

If necessary, place two strips of masking tape over the flange and attach to the hull to temporarily hold in place. Go inside the hull to fit the Nut. Note it is good practice to have a backing plate to spread the load especially if there is excessive curvature in the hull or the hull is very thin.

Hold the thread down near the washer and screw on the Nut. Once the nut is screwed down far enough that you can hold the fitting above the nut do so and continue to screw the nut down onto the washer ensuring it is only finger tight.

On the outside of the hull clean off any excess adhesive. Tip – use an angled tool or putty knife to ‘blend’ adhesive around the Skin Fitting (Thru Hull) flange and the hull so it is easier to clean when sanding and antifouling in the future.

After recommended curing times, tighten the Nut to about 15 ft.lb. There is no need to over-tighten the Nut, especially if epoxy has been used, as the Skin Fitting (Thru Hull) is now an integral part of the hull.



TRUDESIGN™ Skin Fitting Installation Tool – makes fitting a one person operation.

THREAD SEALING:

BALL VALVE TO SKIN FITTING (THRU HULL)

- All the sealants mentioned above under "Hull Adhesives" can be used for thread sealing. These adhesive sealants allow the Ball valve to be "set in position" to suit handle operation with no risk of turning when in use. If in the unlikely event the Ball Valve has to be removed this will require significant force.
- 3M™ Marine Adhesive Sealant Fast Cure 4200 is approximately half the strength (once cured) of 3M 5200 which allows for eventual disassembly of the ball valve from skin fitting.
- LOCTITE® 5331 A one-part acetoxysilicone sealant. Starts to cure (tack-free) in approx. 10 minutes, after which hoses can be attached. Full cure is achieved within 12 hours (at min. 40% atmospheric humidity) – refer to product literature. Creates a permanent seal for threaded connections.
- PTFE (Teflon) Thread Tape is a traditional thread sealing method which provides a good seal when applied correctly. However, in some cases if the position or tightness of the Ball Valve is incorrect, it will need to be unscrewed and more tape applied, slowing the assembly process. Additionally, the fittings can sometimes be turned by hand after being installed.
- LOCTITE® 55 Pipe Sealing Cord is a coated multi-filament cord designed as a faster method than Teflon tape to seal threaded fittings. The main advantage is that a component, for example a Ball Valve, could be screwed down then screwed back a turn to suit positioning whilst still maintaining a tight seal. This eliminates the need to remove the entire Ball Valve and apply more tape as with traditional Teflon tape.

The information contained in this information sheet is for general information purposes only. The information is provided by TRUDESIGN™ and while we endeavour to keep the information up to date and correct, we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability. Any reliance you place on such information is therefore strictly at your own risk.